

542,818

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 August 2004 (19.08.2004)

PCT

(10) International Publication Number
WO 2004/070131 A1

(51) International Patent Classification⁷: **E04C 3/293,**
2/06, 5/065

(21) International Application Number:
PCT/SE2004/000167

(22) International Filing Date: 9 February 2004 (09.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0300332-4 10 February 2003 (10.02.2003) SE

(71) Applicant and

(72) Inventor: **WEGLER, George** [SE/SE]; Loftvägen 11 nb,
S-184 35 Skogås (SE).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: AN ARRANGEMENT OF TRUSS CORDS

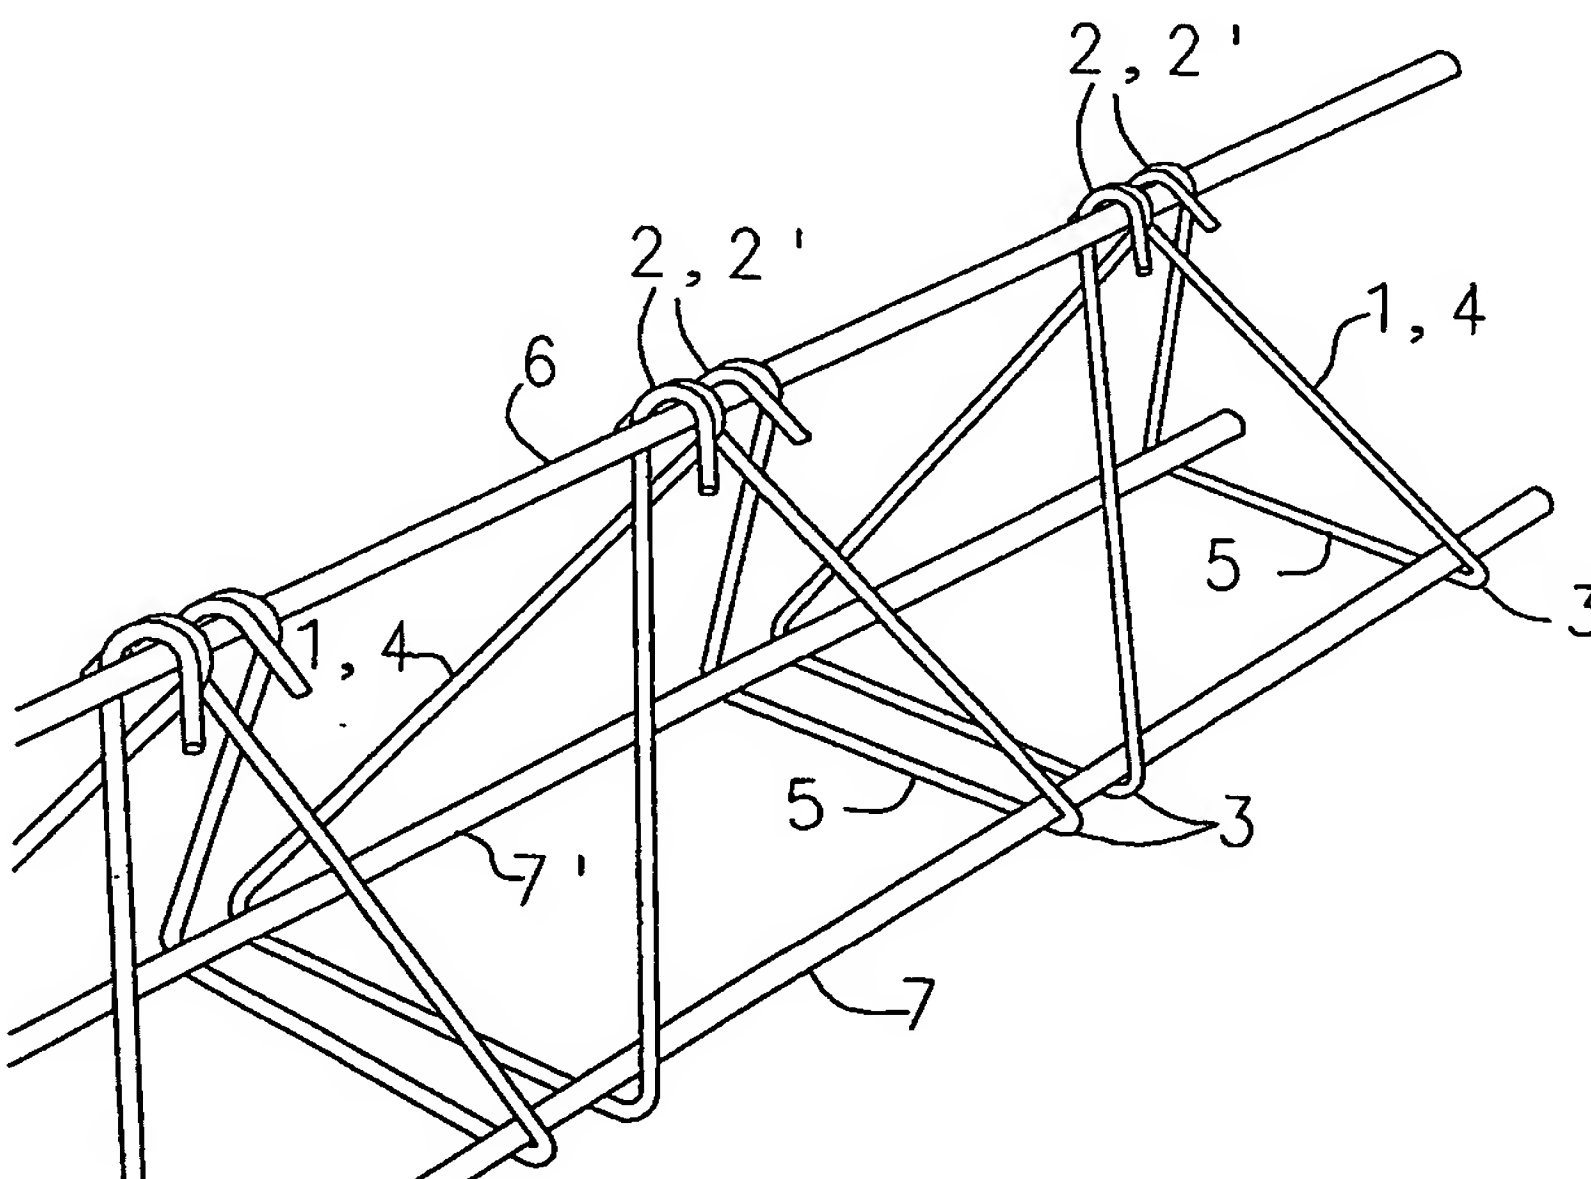

(57) Abstract: A truss web (1,4) for strengthening truss beams (15) to a slab (9) in a building element with at least one cast chord (8). A beam web assembly (1,4), forming a truss web made from bent rods, placed diagonally, when seen in the longitudinal direction of the chord, fastened to the chord and the slab in the element. The truss web members (1,4) are made from rod portions bent into a triangle like shape and has end hooks (2,2') in both ends and are bent symmetrically around the straight middle part of each web member mirrored from each other, so that the straight ends of the web members intersect each other in one of the triangle corners. The ends being oriented adjacent to each other and wrapped over so the end hooks (2,2) form a loop in which reinforcement rods (6), longitudinal to the chord (8), can be threaded inside, and said

end hooks are cast inside the chord (8).

WO 2004/070131 A1